


Mini Canal

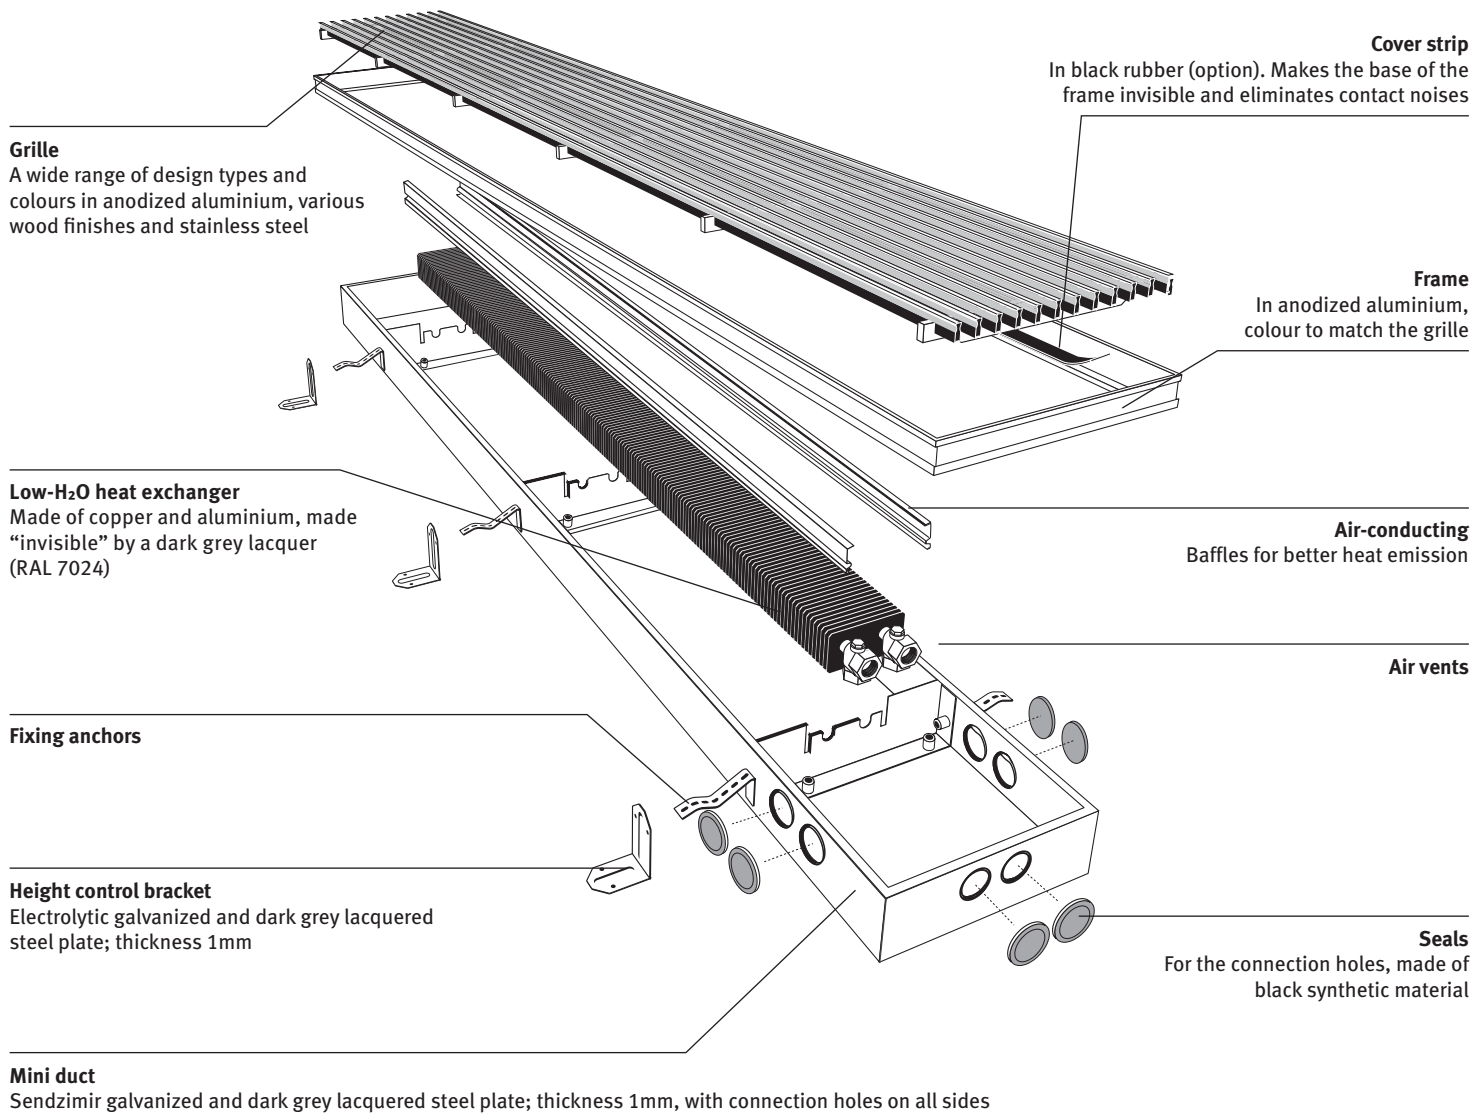

Installation

The Mini Canal is factory assembled and ready to install. Suitable for installation onto rough concrete subfloors, in floating or suspended floors, or even into existing trenches.

Supplied as standard

- Pre-assembled
- Low-H₂O heat exchanger
- Dark grey lacquered in RAL 7024
- Grille in anodized aluminium
- Frame in the same colour as the grille
- Anchorage elements
- Air vent(s) 1/8"
- Drain cock(s) 1/2"
- Height adjusters

Installation guide

- Position level on the finished floor by means of fixing anchors and height control
- Test the pressure of the installation
- Finish the floor
- Detailed installation instructions are available and supplied with the product

Control

- There are several ways to control the heat exchanger:
- With a central control. Temperature regulators via room thermostat and zone valve
 - With manual valve in the duct
 - With thermostatic valve in the duct: in this case it is best to provide a head with remote control outside the duct. Control is simple and the remote thermostatic head will provide better measurement of the ambient temperature

LOW H₂O **30**
YEAR GUARANTEE